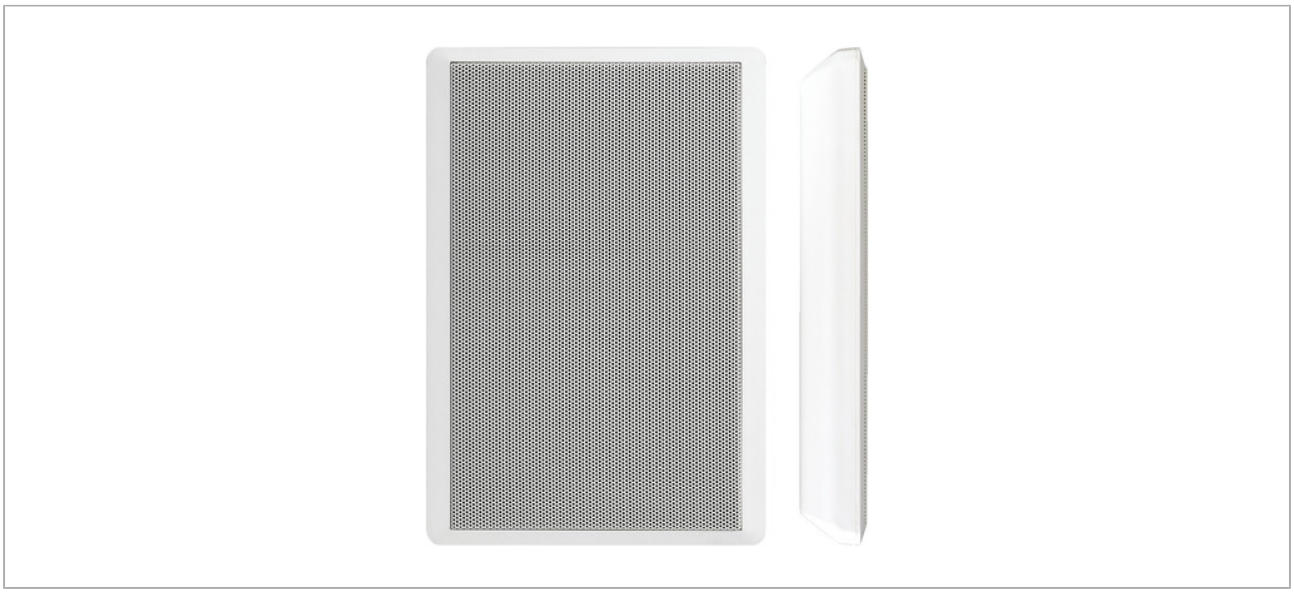


ESP-134/WS

Order no.: 1000264

PRODUCT INFORMATION

These wall speakers impress by an extraordinarily flat design which is only achieved by applying the latest NEODYMIUM magnetic systems.
The ESP-130... speaker systems already provide a very pleasant and complete sound and yet, with a total depth of only 38 mm, they are of such a flat design, that they are just as unobtrusive on the wall as a flush-mount speaker.

PA wall speaker

- 100 V transmission technology via audio transformer with 3 W and 6 W power taps or 4 Ω operation (20 W)
- 2-way system with neodymium bass-midrange speaker and dome tweeter
- White plastic cabinet with protective metal grille
- Slimline design for unobtrusive wall mounting

Manufacturer information:
MONACOR INTERNATIONAL GmbH & Co. KG
Konsul-Smidt-Str. 68
28217 Bremen
Germany
info@monacor.com

SPECIFICATIONS

ESP-134/WS

Active/passive	passive
Transmission technology	100 V or low-impedance
Total power rating	6 W
Power rating (RMS)	6/3 W (100 V) 20 W (4 Ω)
Impedance	4 Ω
Frequency range	80-18,000 Hz
System	2-way
Number of speakers	2
Speaker size	13 cm (5")
SPL	91 dB/W/m
Max. rated SPL	104 dB
Radiation angle/beam angle	H: 100°/V: 60°
Radiation angle, horizontal	100°
Radiation angle, vertical	60°
Housing material	plastic
Colour	white
Mounting device	attachment via screw
Admiss. ambient temp.	0-40 °C
Dimensions	185 x 275 x 38 mm
Width	185 mm
Height	275 mm
Depth	38 mm
Weight	1.25 kg
Inputs	spring-loaded terminal
Packaging dimensions (W x H x L)	0.075 x 0.225 x 0.315 m
Gross weight	1.375 kg
Net weight	1.255 kg

ESP-134/WS

EAN code	4007754276992
Net weight	1.255 kg