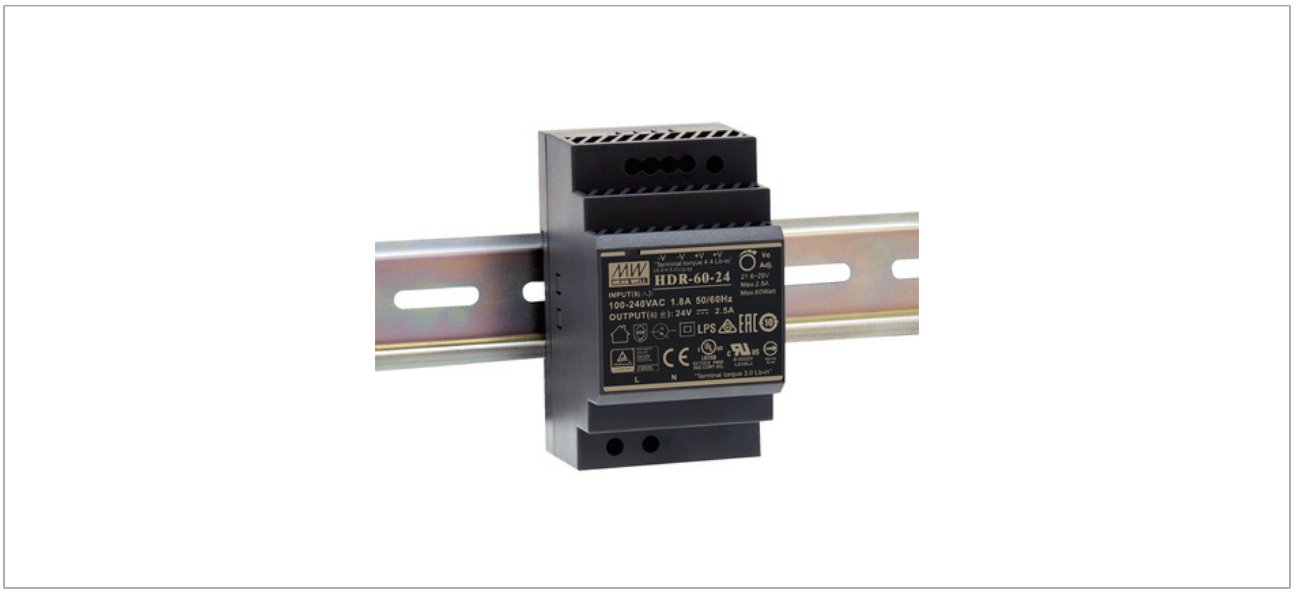


HDR-60/24

Order no.: 1000924

PRODUCT INFORMATION

Switch-mode power supply, 60 W

- For mounting onto DIN rails TS35, e.g. on distributions boards, meter panels, in fuse boxes or control cabinets
- Universal input voltage: ˜ 85-265 V/47-63 Hz
- Output voltage: DC 24 V/2.5 A
- Low no-load power consumption: < 0.3 W
- Fine adjustment of output voltage
- Output power limitation (LPS)
- LED for indicating operating status
- Protected against short circuit, overload, overvoltage and overheating
- EMC standard EN 61000-6-2

Supplied w/o DIN rail.

Range of applications:

- Home technology, smart home
- Building automation
- Industrial control systems

- Production automation
- Electro-mechanical devices

Safety and warning notices

The appliance is supplied with life-threatening mains voltage. Therefore, never tamper with it yourself and do not insert anything into the ventilation openings. There is a risk of electric shock. Do not operate the appliance if there is visible damage to the appliance or the mains cable, if a defect is suspected after a fall or similar, or if malfunctions occur. Always return the appliance to a specialist workshop for repair.

Only use the device indoors and protect it from dripping and splashing water, high humidity and heat (permissible operating temperature range -20 °C to +40 °C).

If the appliance is to be taken out of service permanently, hand it over to a local recycling centre for environmentally friendly disposal.

SPECIFICATIONS

HDR-60/24	
Category	switch-mode power supply
Input voltage	˜ 85-265 V/47-63 Hz
Output voltage	DC 24 V
Output current	2.5 A
Connections	screw terminals
Short-circuit protection	yes
Overload protection	yes
Overheat protection	yes
Admiss. ambient temp.	-30-+70 °C
Dimensions	52.5 x 90 x 58.4 mm
Weight	190 g

HDR-60/24	
EAN code	4007754249552
Net weight	0.191 kg