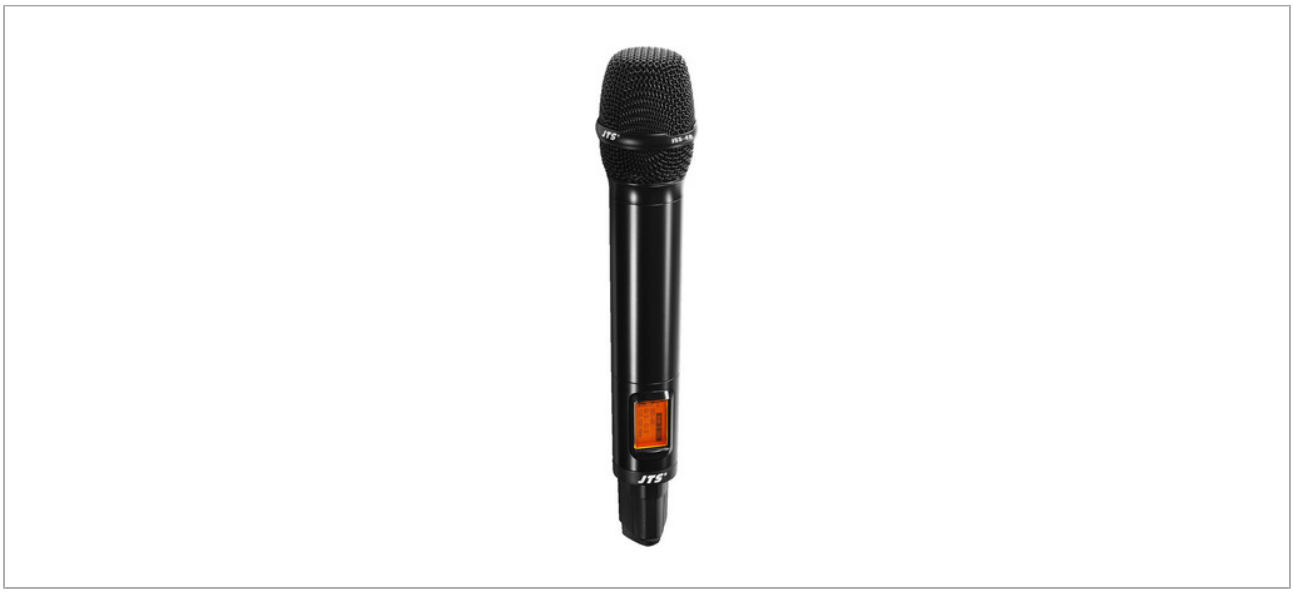


JSS-4B/5

Order no.: 0259390

PRODUCT INFORMATION

Dynamic hand-held UHF PLL transmitter

- Dynamic microphone cartridge (cardioid polar pattern) with wide dynamic range
- Aluminium housing
- Bandwidth: 36 MHz
- 6 groups, each with up to 22 compatible preset channels
- 1,441 selectable individual frequencies
- REMOSET technology for receiver/transmitter synchronisation
- Adjustable sensitivity (-15 dB to +15 dB)
- Lock/mute function
- 4-level display for indicating battery status and low battery alert, backlit LCD
- Switchable transmitting power

There are restrictions or requirements within the EU!

Please read the notes regarding wireless systems in the section “IMPORTANT INFORMATION”!

tools4music 02/2019
“It features good ergonomics, high-quality workmanship and a pleasant sound. I compared it with

a Neumann KMS 104 Plus and the dynamic cartridge of the JSS-4B provides an amazingly close sound.”

How many wireless systems can be operated simultaneously?
With optimum local conditions, it is possible to operate up to 18 wireless systems R-4/5, R-4THA/5, JSS-4B/5, R-4TBM/5 simultaneously.

Manufacturer information:
JTS PROFESSIONAL CO., LTD.
No. 148, Gongye 9th Rd., Dali Dist.
41280 Taichung City
Taiwan
jts@jts.com.tw

EU-Representative:

MONACOR INTERNATIONAL GmbH & Co. KG
Konsul-Smidt-Str. 68
28217 Bremen
Germany
info@monacor.com

Safety Notes and Warning Messages
The unit is suitable for indoor use only. Protect it against dripping water and splash water, high air humidity and heat (admissible ambient temperature range: 0 - 40 °C).
Remove the rechargeable batteries or batteries if the device is not in use for a longer period of time (e.g. more than a week). This avoids possible damage through leaking batteries.
If the unit is to be put out of operation permanently, take it to a local recycling plant for a disposal which is not harmful to the environment.
Batteries and rechargeable batteries must not be disposed of with household waste. They must be disposed of in accordance with local regulations for hazardous waste.

SPECIFICATIONS

JSS-4B/5

Description	hand-held microphone
Transmission method	wireless
Polar pattern	cardioid
System	dynamic
Carrier frequency range	506-542 MHz
Transmitting power	10/50 mW

JSS-4B/5

Power supply	2 x batt. AA size, alkaline (not supplied)
Operating time	> 20 h
Audio frequency range	50-18,000 Hz
Max. sound pressure	150 dB
Housing material	aluminium
Admiss. ambient temp.	0-40 °C
Dimensions	Ø 50 mm x 253 mm
Weight	335 g
Packaging dimensions (W x H x L)	0.3 x 0.08 x 0.1 m
Gross weight	0.63 kg
Net weight	0.385 kg

JSS-4B/5

EAN code	4007754261110
Net weight	0.385 kg