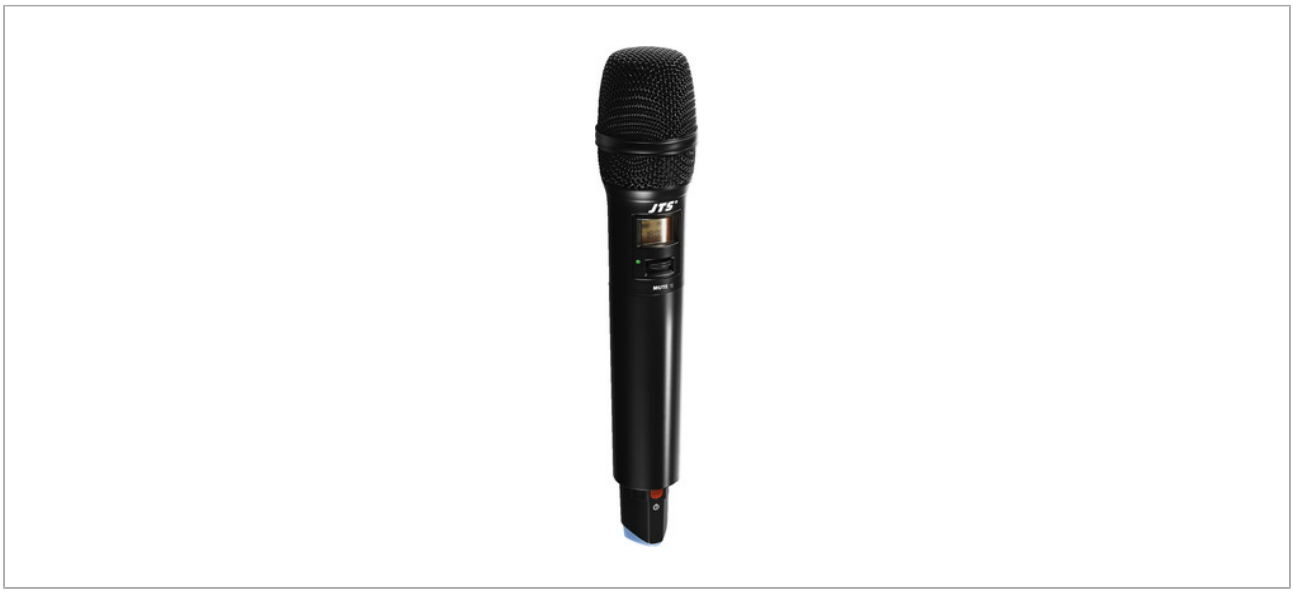


R-4THA/5

Order no.: 0259847

PRODUCT INFORMATION

Hand-held UHF PLL transmitter,
with condenser cartridge.

- Condenser microphone cartridge (cardioid polar pattern)
- Bandwidth: 36 MHz
- 6 groups, each with up to 22 compatible preset channels
- 1,441 selectable individual frequencies
- REMOSET technology for receiver/transmitter synchronisation
- Adjustable sensitivity (±15 dB)
- Lock function/mute function
- 4-level display for indicating battery status and low battery alert, backlit LCD
- Switchable transmitting power

There are restrictions or requirements within the EU!

Please read the notes regarding wireless systems in the section “IMPORTANT INFORMATION”!

tools4music 02/2019
“It also features top-quality workmanship. However, in my opinion, it is visually less appealing

than the JSS-4B. Nevertheless, it provides a pleasant sound.”

How many wireless systems can be operated simultaneously?
With optimum local conditions, it is possible to operate up to 18 wireless systems R-4/5, R-4THA/5, JSS-4B/5, R-4TBM/5 simultaneously.

Manufacturer information:
JTS PROFESSIONAL CO., LTD.
No. 148, Gongye 9th Rd., Dali Dist.
41280 Taichung City
Taiwan
jts@jts.com.tw

EU-Representative:

MONACOR INTERNATIONAL GmbH & Co. KG
Konsul-Smidt-Str. 68
28217 Bremen
Germany
info@monacor.com

Safety Notes and Warning Messages
The unit is suitable for indoor use only. Protect it against dripping water and splash water, high air humidity and heat (admissible ambient temperature range: 0 - 40 °C).
Remove the rechargeable batteries or batteries if the device is not in use for a longer period of time (e.g. more than a week). This avoids possible damage through leaking batteries.
If the unit is to be put out of operation permanently, take it to a local recycling plant for a disposal which is not harmful to the environment.
Batteries and rechargeable batteries must not be disposed of with household waste. They must be disposed of in accordance with local regulations for hazardous waste.

SPECIFICATIONS

R-4THA/5	
Description	hand-held microphone
Transmission method	wireless
Polar pattern	cardioid
System	condenser
Carrier frequency range	506-542 MHz
Transmitting power	10/50 mW

R-4THA/5

Power supply	2 x batt. AA size, alkaline (not supplied)
Operating time	> 20 h
Audio frequency range	50-18,000 Hz
Max. sound pressure	140 dB
Admiss. ambient temp.	0-40 °C
Dimensions	Ø 50 mm x 253 mm
Weight	260 g
Packaging dimensions (W x H x L)	0.1 x 0.08 x 0.295 m
Gross weight	0.545 kg
Net weight	0.306 kg

R-4THA/5

EAN code	4007754268690
Net weight	0.306 kg