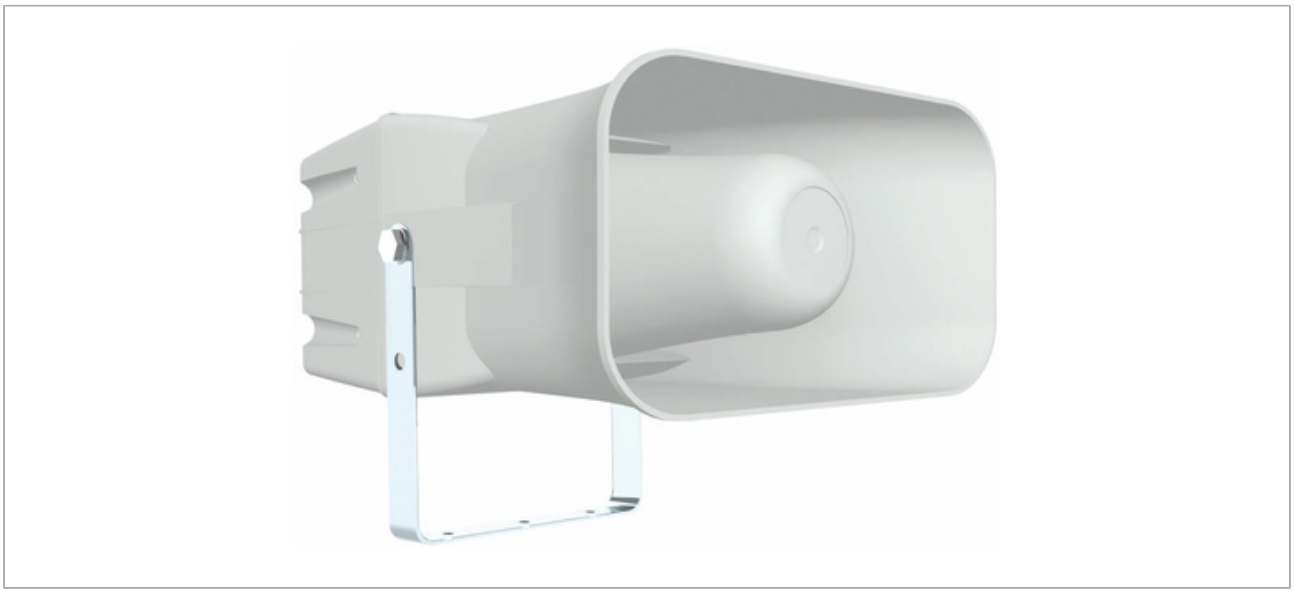


TR-15-T

Order no.: 1001478

PRODUCT INFORMATION

Weatherproof horn speaker

- 100 V transmission technology
- 100 V transformer with 15/7.5/3.75 W power taps
- Integrated high-pass filter for sound and stability optimisation
- Suitable for use in road tunnels and poorly ventilated car parks
- Resistant to exhaust gases (diesel, petrol), de-icing salts (NaCl, CaCl), alkaline water (concrete/corrosion), road dust and vibration from traffic
- IP66 certified
- Light grey ABS housing (self-extinguishing, complies with UL94V0 standard)
- Cable feed via PG cable gland
- Additional drain hole in the pressure chamber housing
- Including mounting bracket made of stainless steel V4A 1.4571

Manufacturer information:
PÖSCHEL ETG e.K.
Mäuswedel 11
74223 Flein
Deutschland
info@poeschel-etg.de

SPECIFICATIONS

TR-15-T

Active/passive	passive
Transmission technology	100 V
Total power rating	15 W
Power rating (RMS)	15/7.5/3.75 W
Frequency range	350-10,000 Hz
Number of speakers	1
SPL	110 dB/W/m
Max. rated SPL	120 dB
Radiation angle/beam angle	H110°/V55°
Radiation angle, horizontal	110°
Radiation angle, vertical	55°
Housing material	ABS
Colour	light grey, RAL 7035
Mounting device	mounting bracket, stainless steel
Protection class	IP66
Admiss. ambient temp.	-40 °C to + 90 °C
Dimensions	180 x 120 x 230 mm
Width	180 mm
Height	120 mm
Depth	230 mm
Weight	2.2 kg
Inputs	M20 cable gland
Other features	weatherproof
Packaging dimensions (W x H x L)	0.18 x 0.18 x 0.267 m
Gross weight	2.1 kg
Net weight	2 kg

TR-15-T

EAN code	4007754430110
Net weight	2 kg