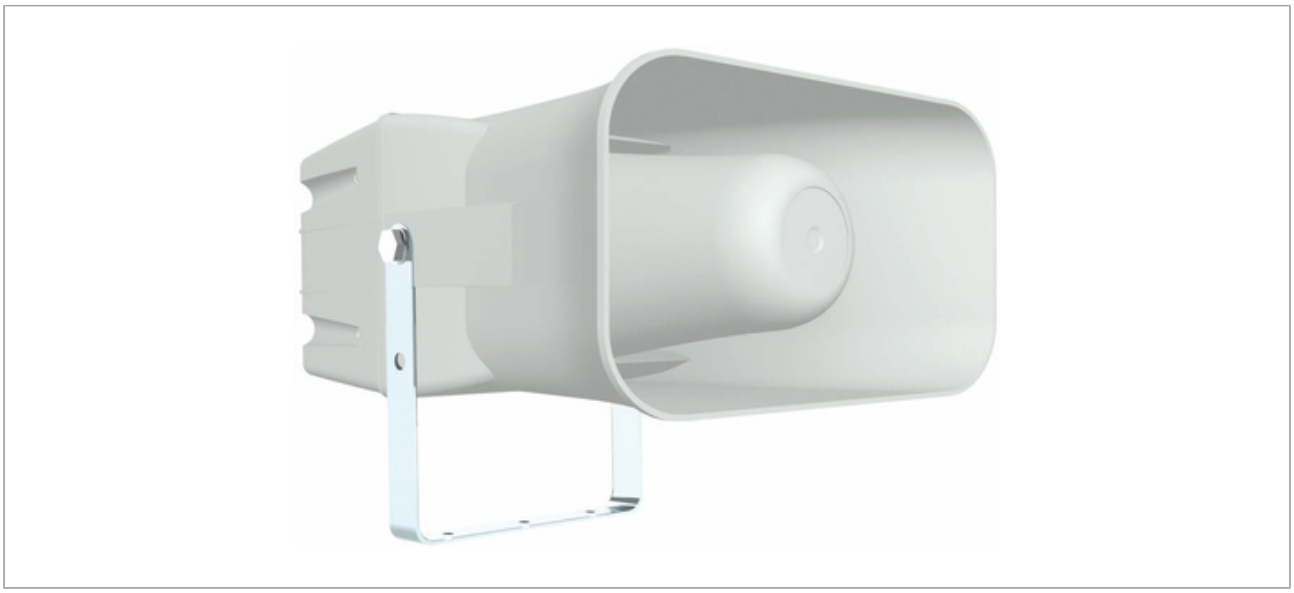


# TR-30-T

Order no.: 1001479

## PRODUCT INFORMATION

**Weatherproof horn speaker**

- 100 V transmission technology
- 100 V transformer with power taps 30/15/7.5 W
- Integrated high-pass filter for sound and stability optimisation
- Suitable for use in road tunnels and poorly ventilated car parks
- Resistant to exhaust gases (diesel, petrol), de-icing salts (NaCl, CaCl), alkaline water (concrete/corrosion), road dust and vibration from traffic
- IP66 certified
- Light grey ABS housing (self-extinguishing, complies with UL94V0 standard)
- Cable feed via PG cable gland
- Additional drain hole in the pressure chamber housing
- Including mounting bracket made of stainless steel V4A 1.4571

**Manufacturer information:**
PÖSCHEL ETG e.K.
Mäuswedel 11
74223 Flein
Deutschland
info@poeschel-etg.de

## SPECIFICATIONS

**TR-30-T**

| | |
|---|---|
| Active/passive | passive |
| Transmission technology | 100 V |
| Total power rating | 30 W |
| Power rating (RMS) | 30/15/7.5 W |
| Frequency range | 350-10,000 Hz |
| Number of speakers | 1 |
| SPL | 110 dB/W/m |
| Max. rated SPL | 123 dB |
| Radiation angle/beam angle | H110°/V55° |
| Radiation angle, horizontal | 110° |
| Radiation angle, vertical | 55° |
| Housing material | ABS |
| Colour | light grey, RAL 7035 |
| Mounting device | mounting bracket, stainless steel |
| Protection class | IP66 |
| Admiss. ambient temp. | -40 °C to + 90 °C |
| Dimensions | 180 x 120 x 230 mm |
| Width | 180 mm |
| Height | 120 mm |
| Depth | 230 mm |
| Weight | 2.3 kg |
| Inputs | M20 cable gland |
| Other features | weatherproof |
| Packaging dimensions (W x H x L) | 0.18 x 0.18 x 0.267 m |
| Gross weight | 2.1 kg |
| Net weight | 2 kg |

**TR-30-T**

| | |
|---|---|
| EAN code | 4007754430127 |
| Net weight | 2 kg |