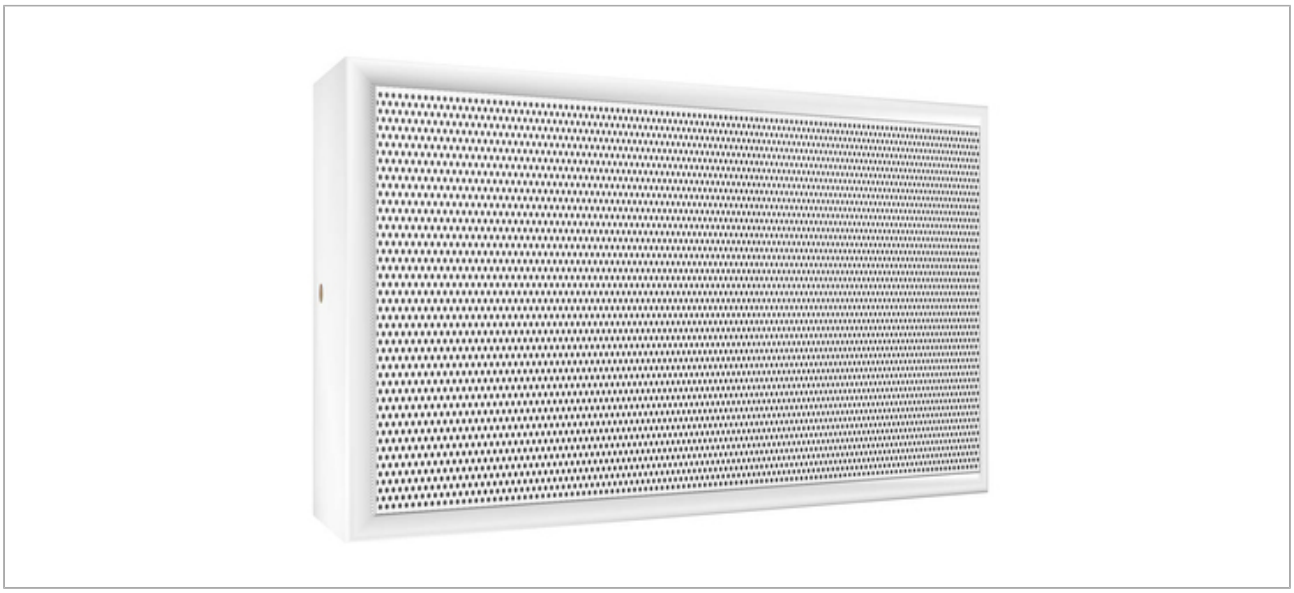


WDW-2000-EN-10

Order no.: 1001422

PRODUCT INFORMATION

PA wall and ceiling speaker
with EN 54-24 certification

- 100 V transmission technology via audio transformer with 3 power taps
- Full range speaker (13 cm)
- Suitable for speech and music transmission
- Moisture-proof speaker cone
- Wooden housing with metal protective grille
- Easy wall mounting using the supplied aluminium bracket and mounting material
- Ball-proof according to DIN 18 032, part 3

Manufacturer information:
PÖSCHEL ETG e.K.
Mäuswedel 11
74223 Flein
Deutschland
info@poeschel-etg.de

SPECIFICATIONS

WDW-2000-EN-10

Active/passive	passive
Transmission technology	100 V
Total power rating	10 W
Power rating (RMS)	10/5/2.5 W
Frequency range	80-19,000 Hz
Number of speakers	1
Speaker size	13 cm (5")
SPL	93 dB (1 W/1 m) 77 dB (EN, 1 W/4 m)
Max. rated SPL	103 dB (1 m) 88 dB (EN, 4 m)
Radiation angle/beam angle	H180°/V180° (500 Hz) H80°/V88° (1 kHz) H131°/V126° (2 kHz) H77°/V69° (4 kHz)
Radiation angle, horizontal	180° (500 Hz) 80° (1 kHz) 131° (2 kHz) 77° (4 kHz)
Radiation angle, vertical	180° (500 Hz) 88° (1 kHz) 126° (2 kHz) 69° (4 kHz)
Features	EN 54-24 certification
Housing material	wood
Colour	white, RAL 9010
Mounting device	aluminium bracket
Protected against ball rebound	yes
Dimensions	265 x 165 x 88 mm
Width	265 mm
Height	165 mm
Depth	88 mm
Weight	1.6 kg
Inputs	WAGO clamp
Packaging dimensions (W x H x L)	0.268 x 0.168 x 0.92 m
Gross weight	1.7 kg
Net weight	1.6 kg

WDW-2000-EN-10

EAN code	4007754429572
Net weight	1.6 kg