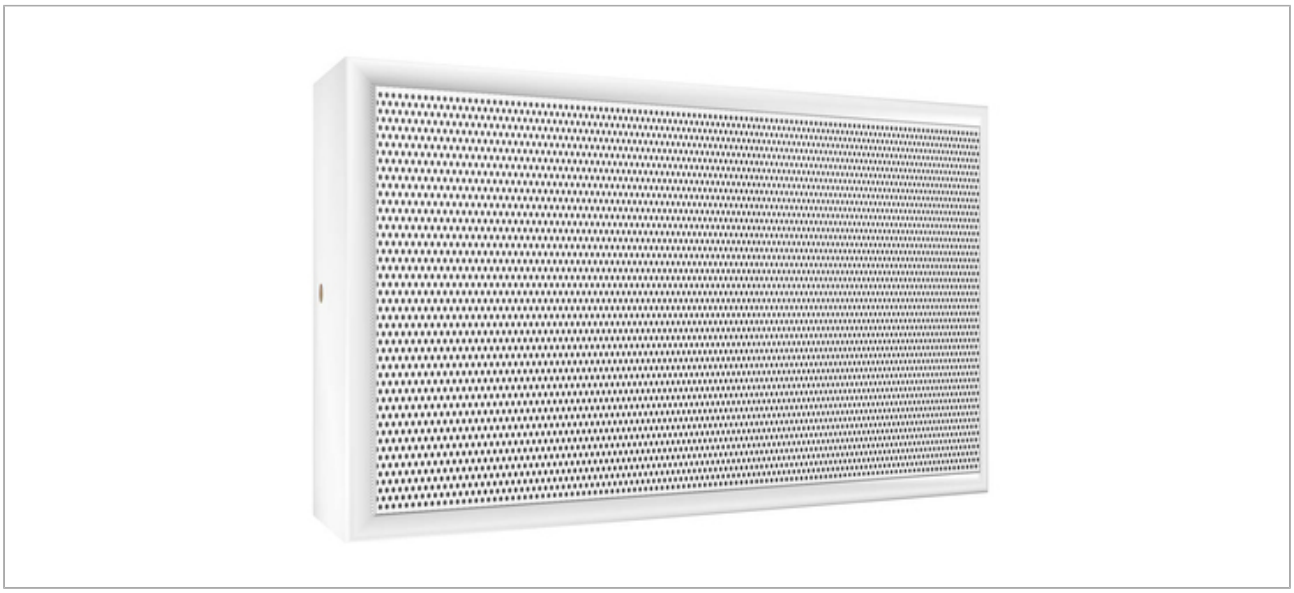


WDW-2000-EN-ABDS

Order no.: 1001424

PRODUCT INFORMATION

PA A/B wall and ceiling speaker
with EN 54-24 certification for evacuation systems with A/B speaker distribution in accordance with EN 60849 and DIN VDE 0833-4.

- 100 V transmission technology via audio transformer with 2 x 3 power taps
- Full range speaker system (13 cm) with dual voice coil for speech and music reproduction
- Moisture-proof speaker cone
- Wooden housing with metal protective grille
- Easy wall mounting using the supplied aluminium bracket and installation material
- Ball-proof according to DIN 18 032, part 3

Manufacturer information:
PÖSCHEL ETG e.K.
Mäuswedel 11
74223 Flein
Deutschland
info@poeschel-etg.de

SPECIFICATIONS

WDW-2000-EN-ABDS

Active/passive	passive
Transmission technology	100 V
Total power rating	2 x 6 W
Power rating (RMS)	2 x 6/3/1.5 W
Frequency range	80-19,000 Hz
Number of speakers	1
Speaker size	13 cm (5")
SPL	93 dB (1 W/1 m) 77 dB (EN, 1 W/4 m)
Max. rated SPL	10 dB (1 m) 86 dB (EN, 4 m)
Radiation angle/beam angle	H180°/V180° (500 Hz) H80°/V88° (1 kHz) H131°/V126° (2 kHz) H77°/V69° (4 kHz)
Radiation angle, horizontal	180° (500 Hz) 80° (1 kHz) 131° (2 kHz) 77° (4 kHz)
Radiation angle, vertical	180° (500 Hz) 88° (1 kHz) 126° (2 kHz) 69° (4 kHz)
Features	EN 54-24 certification
Housing material	wood
Colour	white, RAL 9010
Mounting device	aluminium bracket
Protected against ball rebound	yes
Dimensions	265 x 165 x 88 mm
Width	265 mm
Height	165 mm
Depth	88 mm
Weight	1.7 kg
Inputs	WAGO clamps
Packaging dimensions (W x H x L)	0.268 x 0.168 x 0.092 m
Gross weight	2 kg
Net weight	1.9 kg

WDW-2000-EN-ABDS

EAN code	4007754429589
Net weight	1.9 kg